g		GE Energy	Functio	Functional Testing Specification			
	Parts & Repair Services Louisville, KY			LOU-GED-DS200LRPAGxA			
	Test Procedure for a DS200LRPA LAN RESOLVER						
	MENT REVISION STATUS:	Determined by the last entry in t	he "REV" and "DATE" col				
REV.		DESCRIPTION		SIGNATURE	REV. DATE		
Α	Initial release			Jimmy Morgan	2-6-2018		
В							
С							
Hard co	YRIGHT GENERAL ELECTF pies are uncontrolled and are f IETARY INFORMATION – T	or reference only. THIS DOCUMENT CONTAINS PROP	RIETARY INFORMATION C	OF GENERAL ELECTRIC (COMPANY AND		
MAY NOT BE USED OR DISCLOSED TO OTHERS, EXCEPT WITH THE WRITTEN PERMISSION OF GENERAL ELECTRIC COMPANY.							
	ARED BY y Morgan	REVIEWED BY	REVIEWED BY	QUALITY APP L. Groves	PROVAL		
DATE 02/06	<u> </u>	DATE	DATE	DATE 2/8/2017			

	g	
LOU- GED-DS200LRPAGxA	GE Energy	Page 2 of 13
REV. A	Parts & Repair Services	
	Louisville, KY	

1. SCOPE

1.1 This is a functional testing procedure for a DS200LRPA Card.

2. STANDARDS OF QUALITY

2.1 Refer to the current revision of the IPC-A-610 standard for workmanship standards.

3. APPLICABLE DOCUMENTS

- **3.1** The following document(s) shall form part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue shall apply.
 - **3.1.1** Check board's electronic folder for more information

4. **ENGINEERING REQUIREMENTS**

- 4.1 Equipment Cleaning
 - **4.1.1** Equipment should be clean and free of debris prior to applying power unless performing an initial check. Refer to site specific SRA's for cleaning guidelines.
- 4.2 Equipment Inspection
 - **4.2.1** Equipment should be visually inspected for any defects prior to applying power. This inspection should include the following as a minimum:
 - 4.2.1.1 Wires broken, cracked, or loosely connected
 - 4.2.1.2 Terminal strips / connectors broken or cracked
 - 4.2.1.3 Components visually damaged
 - **4.2.1.4** Capacitors bloated or leaking
 - 4.2.1.5 Solder joints damaged or cold
 - 4.2.1.6 Circuit board burned or de-laminated
 - 4.2.1.7 Printed wire runs / Traces burned or damaged

5. EQUIPMENT REQUIRED

5.1 The following equipment is required to perform the process requirements. Equipment may be substituted provided that all accuracy's and test ratios are equivalent or better.

Qty	Reference #	Description
1		LRPA Test Fixture
1		Dual trace Oscilloscope
1		0-120 VARIAC
1		Digital Multimeter
1		(roger) Test PC & RS232 Cable (serial 1 on pc)

g

LOU- GED-DS200LRPAGXA REV. A

GE EnergyParts & Repair Services
Louisville, KY

Page 3 of 13

6. Modifications/Upgrades

6.1 None

7. Testing Process

7.1 Setup

7.1.1

WARNING!!!

THE VOLTAGE AND CURRENT SOURCES APPLIED TO THIS BOARD EXCEED 100VAC. THEREFORE EVERY PRECAUTION SHOULD BE TAKEN TO PREVENT EITHER THE TEST OPERATOR OR PASSERBY FROM COMING IN CONTACT WITH THE ENERGISED PORTIONS OF THE CARD OR TEST EQUIPMENT BEING USED DURING THE TEST PROCEDURE.

NOTE: The DS200LRPAG2A is used to gage rolling thickness, among other applications, accuracy is critical. Test limits absolute.

7.1.2 JUMPER SETTINGS

JUMPER	POSITION	LOC	JUMPER	POSIT	ION LOC	JUMPER	POSITION	LOC
JP58	1-2	[G2]	JP1	1-2	[A1]	JP5	IN	[B8]
JP52	2-3	[G2]	JP2	1-2	[A1]	JP3	IN	[C7]
JP53	2-3	[G2]	JP10	SER	[A7]	JP54	1-2	[E4]
JP50	2-3	[G2]	JP6	IN	[A8]	JP56	10 KHZ	[D5]
JP51	2-3	[G2]	JP7	IN	[A8]	JP57	10 KHZ	[E5]
JP55	1-2	[G2]	JP8	IN	[A8]	JP64	1-2	[D9]
JP68	1-2	[G6]	JP9	IN	[A8]	JP4	IN	
JP62	2-3	[G6]						
JP63	2-3	[G6]						
JP60	2-3	[G7]						
JP61	2-3	[G7]						
JP65	1-2	[G7]						
712								

7.1.3

Adjust POTS RV1, RV2, RV3, and RV4 to Maximum CCW.

7.1.4

- 1. Connect test fixture connectors TB1 through TB4, LNTB and FXTB to UUT.
 - 2. Connect COMP (RS232) connector to P.C. (MUST be COM1).
 - 3. Set test fixture power switch in the OFF position.
 - 4. Connect test fixture power cable to Variac.
 - 5. Connect Variac to 115VAC outlet.
 - 6. Insert Test Prom (DS200LRPAF1ACC OR GREATER) into U8 socket.
 - 7. Connect DVM and scope (-) to fixture COM.
 - 8. Set variac to 0VAC.

g

LOU- GED-DS200LRPAGXA REV. A

GE Energy Parts & Repair Services Louisville, KY

Page 4 of 13

7.2 Testing Procedure

- 7.2.1 Turn fixture power switch on.
- 7.2.2 Increase Variac until TP24 (P24) is 5.1VDC
- 7.2.3 Verify the following supply voltages are present.
 - 7.2.3.1 TN24 -4.5 TO -6.5 VDC
 - 7.2.3.2 TP15 3.0 TO 5.5VDC
 - 7.2.3.3 TN15 -3.0 TO -5.5VDC
 - 7.2.3.4 TN5 -2.5 TO -4.5VDC
 - 7.2.3.5 TP5 2.5 TO 4.5 VDC
- 7.2.4 Leave DVM on TP5.
- 7.2.5 Slowly increase Variac to 115VAC while monitoring TP5. TP5 should never go above 5.05VDC. If this occurs stop increasing the variac and troubleshoot.
- 7.2.6 Verify the following supply voltages with respect to COM.
 - 7.2.6.1 TP5 4.95 TO 5.05VDC
 - 7.2.6.2 TN5 -4.75 TO -5.25VDC
 - 7.2.6.3 TP24 24.0 TO 26VDC
 - 7.2.6.4 TN24 -24 TO -26VDC
 - 7.2.6.5 TP15 13.5 TO 16.5VDC
 - 7.2.6.6 TN15 -13.5 TO -16.5VDC
- 7.2.7 Verify both UUT and fixture A15N and B15N led's are lit.
- 7.3 Gain tests.
 - 7.3.1 Note: we are measuring precision amplifier circuit gains, values must be within tolerance.
 - 7.3.2 Connect DVM + TO AEXP on fixture. Adjust pot RV1 CW until you read 1.33Vrms +/- 0.01Vrms.
 - 7.3.3 Move DVM + to BEXP on fixture. Adjust pot RV2 CW until you read 1.33Vrms +/- 0.01Vrms.
 - 7.3.4 Verify the following TP on the UUT reads 1.975 to 2.025 Vrms.
 - 7.3.4.1 ASIN [E2]
 - 7.3.4.2 ACOS [E2]
 - 7.3.4.3 BSIN [E7]

LRPAGxA

LOU- GED-DS200LRPAGXA REV. A

GE EnergyParts & Repair Services
Louisville, KY

Page 5 of 13

7.3.4.4 BCOS [D8]

- 7.4 Phase shift adjustment.
 - 7.4.1 Power fixture off, set jumpers JP56 and JP57 to 5KHZ position.
 - 7.4.2 Power unit back on.
 - 7.4.3 Connect Ch1 probe of oscilloscope to TP3A [AREF].
 - 7.4.4 Connect Ch2 probe to oscilloscope TP1A [ASIN].
 - 7.4.5 Set both scope channels in the center of the CRT.
 - 7.4.6 Adjust POT RV1 until both waveforms are equal (overlap the signals on the crt).
 - 7.4.7 Move Ch2 probe to TP2A [ACOS] and verify waveforms are also equal.
 - 7.4.8 Move Ch1 probe to TP3B [BREF].
 - 7.4.9 Move Ch2 probe to TP1B [BSIN].
 - 7.4.10 Adjust POT RV2 until both waveforms are equal (overlap the signals on the crt).
 - 7.4.11 Move Ch2 probe to TP2B [BCOS] and verify waveforms are also equal.
 - 7.4.12 Adjust POT RV4 fully CW.
 - 7.4.13 Verify a 170 to 180 degree phase shift.
 - 7.4.13.1 Adjust POT RV4 CCW for a ½ minor time division phase shift FIG #1.




FIG. #1

- 7.4.14 Move Ch1 probe to TP3A [E4] (AREF).
- 7.4.15 Move Ch 2 probe to TP1A [E2] (ASIN).
- 7.4.16 Adjust POT RV3 fully CW.
- 7.4.17 Verify a 170 to 180 degree phase shift.
 - 7.4.17.1 Adjust POT RV3 CCW for a ½ minor time division phase shift. FIG#1
- 7.5 Lan Test.
 - 7.5.1 On the pc navigate to the LRPA test as follows.
 - 7.5.1.1 DS200 BOARDS <ENTER>

LOU- GED-DS200LRPAGxA REV. A g

GE Energy Parts & Repair Services Louisville, KY Page 6 of 13

- 7.5.1.2 DS200 CARDS<ENTER>
- 7.5.1.3 DS200LRPA TEST<ENTER>
 - 7.5.1.3.1 You should see a blue menu on the display.
- 7.5.1.4 Press the down arrow 10 times (this will highlight a blank selection under "help information", this is a hidden menu item. Press <enter>
- 7.5.1.5 Enter password : LRPA <enter>
 - 7.5.1.5.1 You should now be at another menu titled "mfg utility menu"
- 7.5.1.6 On the card, momentarily press SW21 (reset).
 - 7.5.1.6.1 Verify LED CR1 comes on steady.
 - 7.5.1.6.2 Verify LED CR6 and CR11 are on steady.
 - 7.5.1.6.3 Verify fixture LED "AOK" and "BOK" are on steady.
 - 7.5.1.6.3.1 NOTE: if this step fails you possibly have a faulty nvram [U6].

 Replace it and follow the note at the bottom of this document for programming instructions.
- 7.6 Single Step Spin Test.
 - 7.6.1 Type "1" on the PC to select the "single step spin test". <enter>
 - 7.6.2 By momentarily pressing <enter> on the PC to receive a new position count, verify both channel A and channel B position count, in decimal is within Limits and the last digit does not jump by more than one count, see Fig#2.




Fig. #2


- 7.6.2.1 Position 1 510 to 515
- 7.6.2.2 Position 0 4095 to 3
- 7.6.2.3 Position 1 510 to 515
- 7.6.2.4 Position 2 1022 to 1027
- 7.6.2.5 Position 3 1534 to 1539

LOU- GED-DS200LRPAGXA
REV. A

GE Energy
Parts & Repair Services
Louis ville, KY

Page 7 of 13

- 7.6.2.6 Position 4 2046 to 2051
- 7.6.2.7 Position 5 2558 to 2563
- 7.6.2.8 Position 6 3070 to 3075
- 7.6.2.9 Position 7 3582 to 3587
- 7.6.2.10 Position 0 4095 to 3
- 7.6.3 Press <q> on the pc to exit this test and return to the menu.
- 7.7 High speed spin test.
 - 7.7.1 Set up scope
 - 7.7.1.1 Trigger ch-1
 - 7.7.1.2 Trigger pos edge
 - 7.7.1.3 Sweep 2uSec/div
 - 7.7.1.4 Ch1 and CH2 DC couple
 - 7.7.1.5 Ch1 and Ch2 5V/div
 - 7.7.2 Connect Ch1 probe to test fixture "AMPP"
 - 7.7.3 Connect CH2 probe to test fixture "APULSES"
 - 7.7.4 TYPE <3><ENTER> on the pc to select "high speed spin test"
 - 7.7.5 On the test fixture, select "Position1" with rotary switch A.
 - 7.7.5.1 Verify marker pulses AMPP and AMPN as shown in Fig #3.




7.7.6 On the test fixture, select "Position 2" with rotary switch A.

LOU- GED-DS200LRPAGxA
REV. A

GE Energy
Parts & Repair Services
Louis ville, KY


Page 8 of 13

7.7.6.1 Verify AAPP signal as shown in Fig #4.




7.7.7 On the fixture, select "Position 3" with rotary switch A.

7.7.7.1 Verify AAPN signal as shown in Fig #5.



7.7.8 On the fixture, select "Position 4" with rotary switch A.

7.7.8.1 Verify ABPP signal as shown in Fig #6.

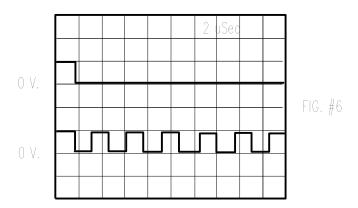


7.7.9 On the fixture, select "Position 5" with rotary switch A.

LOU- GED-DS200LRPAGxA
REV. A


GE Energy
Parts & Repair Services
Louis ville, KY

Page 9 of 13

7.7.9.1 Verify ABPN signal as shown in Fig #7.

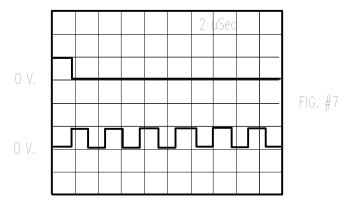

- 7.7.10 Move Ch1 probe to test fixture "BMPP"
- 7.7.11 Move CH2 probe to test fixture "BPULSES"
- 7.7.12 On the test fixture, select "Position 1" with rotary switch B.
 - 7.7.12.1 Verify marker pulses, BMPP and BMPN as shown in Fig #8.

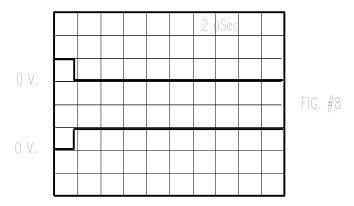


7.7.13 On the test fixture, select "Position 2" with rotary switch B.

LOU- GED-DS200LRPAGxA
REV. A


GE Energy
Parts & Repair Services
Louis ville, KY

Page 10 of 13


7.7.13.1 Verify BAPP signal as shown in Fig #9.

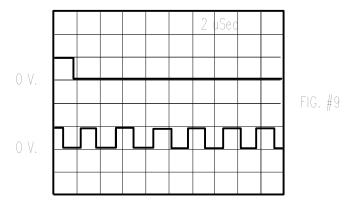

7.7.14 On the test fixture, select "Position 3" with rotary switch B. 7.7.14.1 Verify BBPN signal as shown in Fig #10.

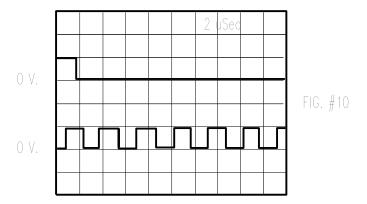

7.7.15 On the test fixture, select "Position 4" with rotary switch B.
7.7.15.1 Verify BBPP signal as shown in Fig #11.

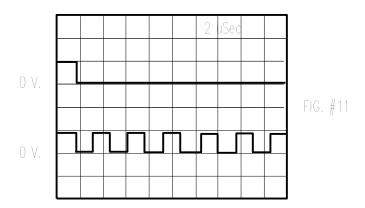


7.7.16 On the test fixture, select "Position 5" with rotary switch B.

LOU- GED-DS200LRPAGXA
REV. A

GE Energy
Parts & Repair Services
Louisville, KY

Page 11 of 13

7.7.16.1 Verify BBPN signal as shown in Fig #12.

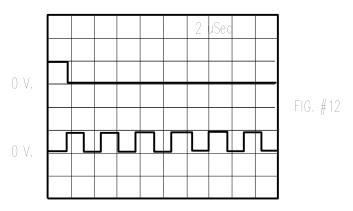

- 7.7.17 Turn test fixture off.
- 7.7.18 Move JP55 and JP65 to the 2-3 position.
- 7.7.19 Turn test fixture on.
 - 7.7.19.1 Verify previous waveforms now have an amplitude of 14.5 to 15.2V on BPulse, BMPP, AMPP, and APulse.
- 7.7.20 Turn test fixture off, move jumpers JP55 and JP65 back to the 1-2 position.
- 7.7.21 Turn test fixture back on.
- 7.8 Forced signal loss.
 - 7.8.1 On the pc, type <5><enter> to select "force signal loss".
 - 7.8.1.1 Wait 5 seconds.
 - 7.8.1.2 Verify Led CR1 blinks off and on.
 - 7.8.1.3 Verify LED CR6, CR11 are not lit.
 - 7.8.1.4 Verify fixture LED "AOK" and "BOK" are not lit.
 - 7.8.2 Type <7><enter> on the pc to select "read fault and status word"
 - 7.8.2.1 Verify that status word as Bit 0 and 1 set to a "1", the other bits do not matter in this test.
 - 7.8.2.2 Type <enter> to exit
 - 7.8.3 On the card, momentarily press SW21.
 - 7.8.3.1 Verify LED CR1, and fixture led's "AOK" and "BOK" are on steady.
- 7.9 Forced tracking loss/ Re-init/ soft reset.
 - 7.9.1 Type <6><enter> on the pc to select "force tracking loss".
 - 7.9.1.1 Verity LED CR1 blinks off and on.
 - 7.9.2 Type <4><enter> on the pc to select "soft reset"

LOU- GED-DS200LRPAGXA
REV. A

GE Energy
Parts & Repair Services
Louis ville, KY

Page 12 of 13

- 7.9.3 Type <8><enter> on the pc to select "re-init and clear status word".
- 7.9.4 Type <7><enter> on the pc to select "read fault and status word".
 - 7.9.4.1 Verify LED CR1 is on steady.
 - 7.9.4.2 Verify fixture led's "AOK" and "BOK" are on steady.
 - 7.9.4.3 Verify that the status word as all "bits" set to a "0".
 - 7.9.4.3.1 Example: 0000000000000
 - 7.9.4.4 Type <enter> on the pc to exit.
- 7.9.5 Remote reset
 - 7.9.5.1 Type <5><enter>, wait 5 seconds, type <5><enter> on the pc to select "forced signal loss".
 - 7.9.5.1.1 Verify LED CR1 blinks off and on.
 - 7.9.5.1.2 Verify fixture LED "AOK" and "BOK" are not lit.
 - 7.9.5.2 Momentarily connect TP5 to card JP58 pin 3 (do not use fixture jack).
 - 7.9.5.2.1 Verify LED CR1 blinks off and on.
 - 7.9.5.2.2 Verify fixture LED "AOK" is on steady.
 - 7.9.5.2.3 Verify fixture LED "BOK" is not lit.
 - 7.9.5.3 Momentarily connect TP% to card JP68 pin 3 (do not use fixture jack).
 - 7.9.5.3.1 Verify LED CR1 is on steady.
 - 7.9.5.3.2 Verify LED's "AOK" and "BOK" are on steady.
 - 7.9.5.4 Type <999><enter> on the pc to exit to the main menu.
- 7.10 Power down and final settings.
 - 7.10.1 Turn fixture off.
 - 7.10.2 Remove test prom. Install prom level "ACC" on every card.
 - 7.10.3 Replace all green connectors on the card.
 - 7.10.4 Set JP56-57 to position 2-3 (10KHZ)
 - 7.10.5 Set JP58 and JP68 to position 2-3.
 - 7.10.6 Set RV1 and RV2 max CCW.

7 11	Post Testing Burn-in	Require	d Yes	Y	No
<i>1</i> . I I	rost resume burn-in	Require	u 1es	^_	_ INO

J

LOU- GED-DS200LRPAGXA
REV. A

GE Energy
Parts & Repair Services
Louisville, KY

Page 13 of 13



Note: All MARK I, II, & III Turbine related cards require a post testing burn-in of 100 hours.

7.12 ***TEST COMPLETE ***

8. Notes

- **8.1** Programming U6 NVRAM.
 - **8.1.1** The following steps require you have the card powered up on the test fixture, and connected to the pc with a new U6 NVRAM installed on the card.
 - 8.1.2 At the main menu (First blue screen that has the hidden menu on it), arrow down to file==→ LRPA then press <enter>
 - **8.1.3** Arrow over to "tstgn.hex" and press <enter>. You will see some code on the screen and then a return to the main menu.
 - **8.1.4** At this time, your card should reboot and hopefully the "AOK" and "BOK" lights should come on solid. (if that was your original problem).

9. Attachments

9.1 None at this time?